



Professional

Point-of-Sale Solutions

RETAIL



ITMEDIAPOS 700

The flexible POS checkout system



Rev 3 – 2026/01/29



MADE IN
GERMANY



<https://itmediaconsult.de>

ITMediaConsult AG
Gut Retzenhöhe 1
54422 Züsch
Deutschland


Telefon:
06503/98195-0
Email:
vertrieb@itmediaconsult.de





ITMEDIAPOS 700

Display

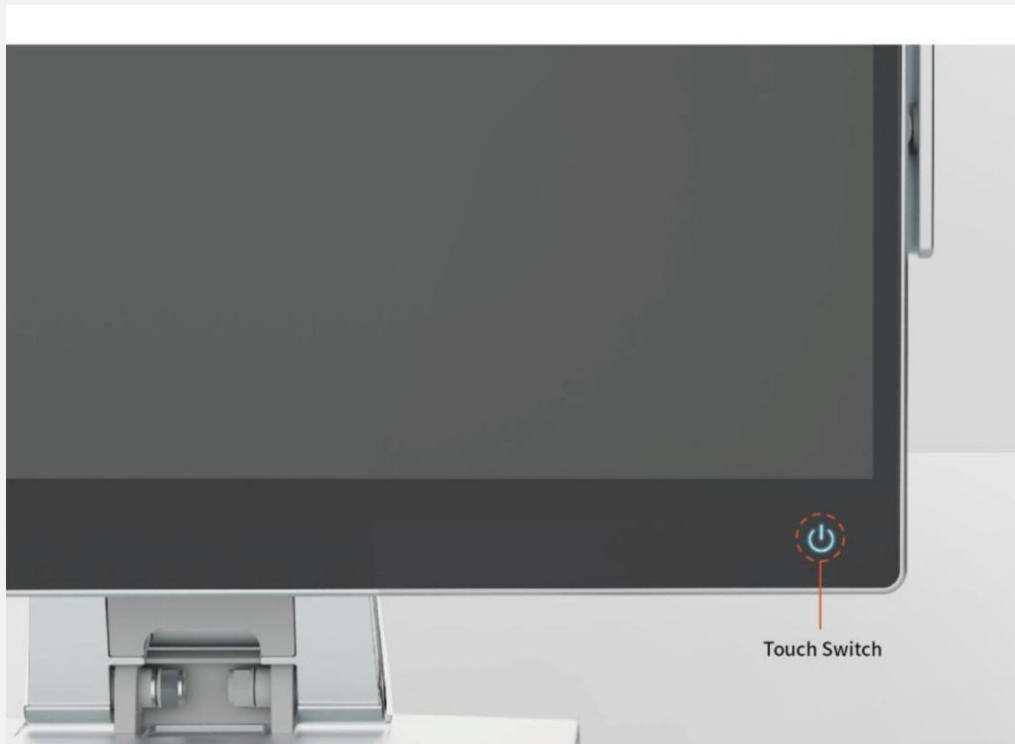

15.6" | Wide Screen(16:9)

1920 x 1080 | Resolution

180° | Wide viewing angle
FHD IPS screen

10 Points | Pcap touch screen

7H | Scratch-resistant Glass
on PCAP Touch

Specifications may be changed without prior notice. Please update your specification before purchasing the product.



ITMEDIAPOS 700

Technical Data

Specification		
Processors	Intel® Celeron® J6412 1.5M Cache, up to 2.60 GHz	Intel® Core™ i3-1115G4 6M Cache, up to 4.10 GHz Intel® Core™ i5-1135G7 8M Cache, up to 4.20 GHz
Chipset	Intel® Elkhart Lake	Intel® Tiger Lake
Memory	8GB Standard, DDR4 3200MHz(Max. 32GB)	8GB Standard, DDR4 3200MHz(Max. 32GB)
Storage		
Operating Systems	Windows 10 IoT Enterprise LTSC/Windows 11 IoT Enterprise/Linux	
Audio	Realtek® HDA Codec	
Display		
Type	15.6" FHD IPS LCD, LED Backlight	
Resolution	1920 x 1080	
Brightness	300 cd/m ² (typ.)	
Touchscreen	10-Points Projected Capacitive Touch	
Interface		
Display	1 x MINI-HDMI: resolution up to 4096 * 2160@24Hz 1 x DP(Non-standard definitions): resolution up to 1920 * 1200@60Hz	
Serial	3 x RS232 RJ50(Extension box)	
USB	1 x USB2.0 (TC-DP) 2 x USB3.0 (TYPE-A) 2 x USB2.0 (TC-USB, Extension box) 1 x 12V PUSB (Extension box) 1 x 24V PUSB (Extension box)	
LAN	1 x Realtek® 1Gbps PCIe Ethernet Controller, RJ45 1 x Realtek® 1Gbps PCIe Ethernet Controller, RJ45(Extension box)	
CashDrawer Port	1 x RJ-11(Extension box)	
Audio	1 * Line-Out/MIC 2in1 Phone Jack	
Power Input	1 x 12V Power Input Connector(USB-C) 1 x 24V Power Input Connector(4Pin DIN Plug, Extension box)	
Expansion Interface	1 x M.2 for WIFI/BT	
Physical & Environmental		
Operating Temperature		
Storage Temperature	-20 °C ~ 80 °C at 10% to 90% Humidity	
Dimensions (W x H x D)	360 x 300 x 230 (mm), 14.2 x 11.8 x 9 (in)	
Packing Dimensions (W x H x D)	490 x 170 x 285 (mm), 19.3 x 6.7 x 11.2 (in)	
Net Weight	3.8 kgs, 8.4 lbs	
Gross Weight	5.4 kgs, 11.9 lbs	
Certification	CE, FCC, RoHS, UKCA	
Color	Anodizing Silver	
Options & Peripherals		
Customer Display	VFD, 20 Columns x 2 Lines 11.1" (1366 x 768), 13.3" (1920 x 1080) LCD Display, Optional Touchscreen	
Peripherals	Fingerprint reader (USB) Dallas i-button Reader(USB) Magnetic Stripe Reader(USB, Support 1 & 2 & 3 Track)	
Wall Mount/Pole Mount	VESA-Compatible, Support both 75 x 75 (mm) and 100 x 100 (mm)	
Speaker	2 x 2W (Stereo)	
WiFi / BT	802.11ac(Standard), Optional 802.11ax	

Specifications may be changed without prior notice. Please update your specification before purchasing the product.



Professional

Point-of-Sale Solutions

RETAIL **ITMEDIAPOS 700****IP65**

- Laminated screen with enhanced seal design
Better display quality, No dusty and foggy screen
IP65 rating on front screen




Specifications may be changed without prior notice. Please update your specification before purchasing the product.



ITMEDIAPOS 700

Cooling

- Complete Fan-less with unique dimensional heat dissipation design

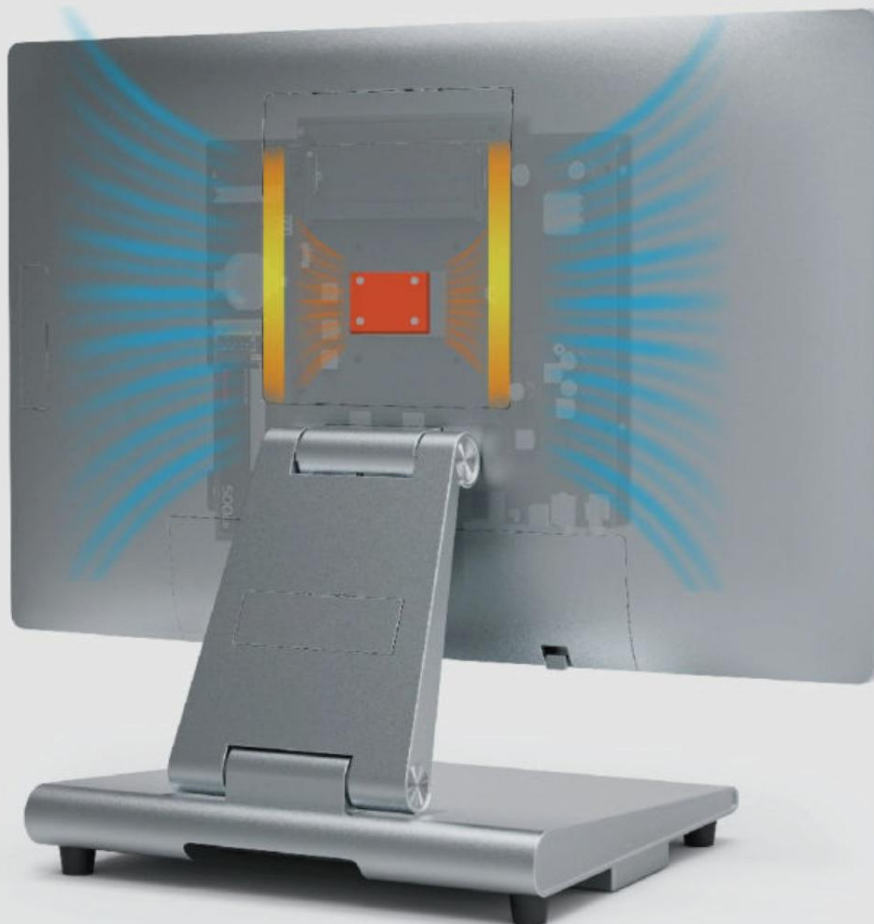

Specifications may be changed without prior notice. Please update your specification before purchasing the product.



Professional

Point-of-Sale Solutions

RETAIL

ITMEDIAPOS 700

Processors

- Swappable System BOX with the latest Intel® high-performance processors



• Intel® Core i3



• Intel® Core i5



Improve efficiency of stock management and after-sales service

Simplify upgrade of CPU , RAM and SSD

Unleash system potential for demanding POS applications

Save RMA time and cost

Specifications may be changed without prior notice. Please update your specification before purchasing the product.



<https://itmediaconsult.de>

ITMediaConsult AG
Gut Retzenhöhe 1
54422 Züsch
Deutschland


Telefon:
06503/98195-0
Email:
vertrieb@itmediaconsult.de





ITMEDIAPOS 700

Stand

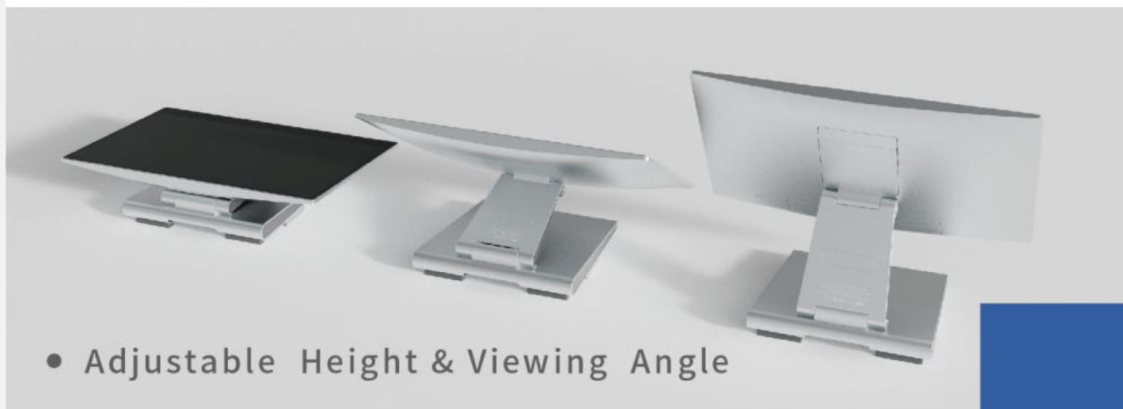

- Adjustable Height & Viewing Angle



- Heavy-duty Aluminum Die-casting Housing

Specifications may be changed without prior notice. Please update your specification before purchasing the product.



Professional

Point-of-Sale Solutions

RETAIL

ITMEDIAPOS 700

NVME

- Swappable NVME SSD



Specifications may be changed without prior notice. Please update your specification before purchasing the product.



Professional

Point-of-Sale Solutions

RETAIL

ITMEDIAPOS 700

Options

- High interchangeable peripherals



• VFD



• MSR



• 11.6" 2nddisplay



• i-button



• 13.3" 2nddisplay



• Fingerprint



Specifications may be changed without prior notice. Please update your specification before purchasing the product.



ITMEDIAPOS 700

Interfaces

- Rich I/O interfaces

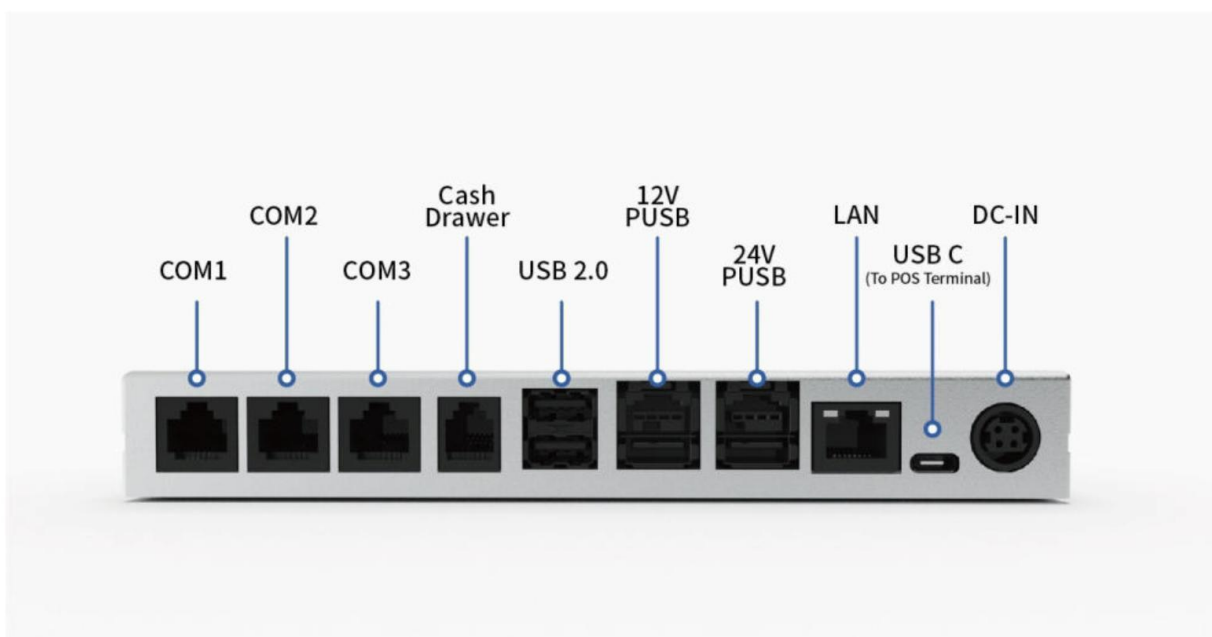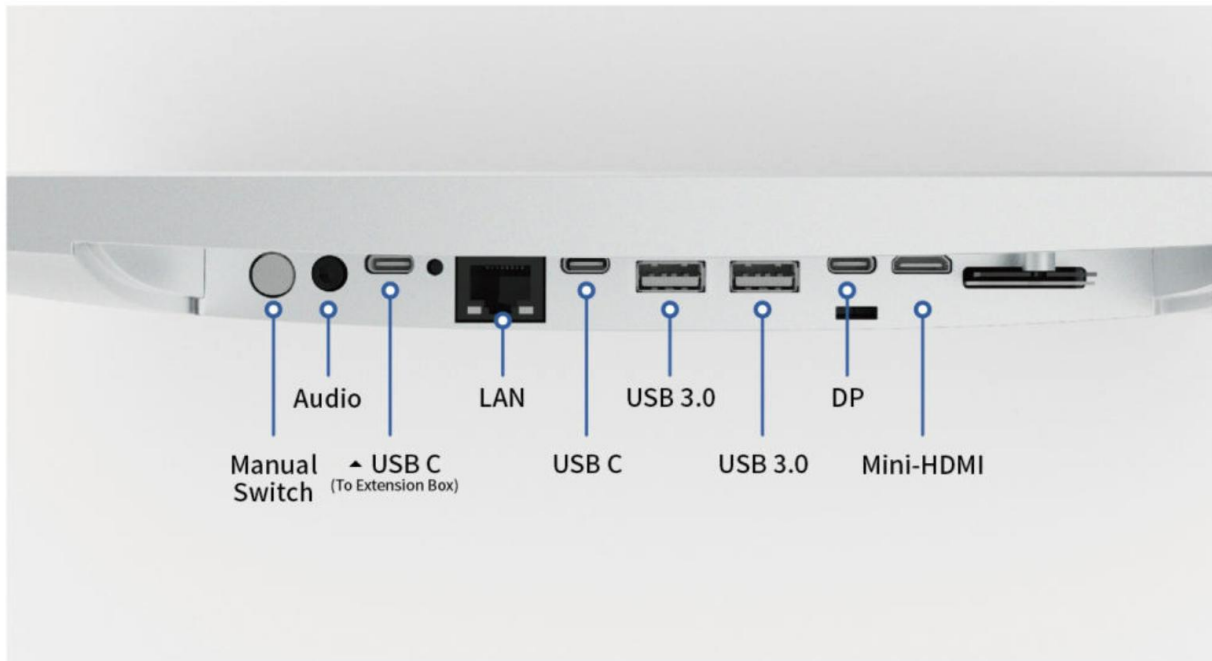

Specifications may be changed without prior notice. Please update your specification before purchasing the product.



Professional

Point-of-Sale Solutions

RETAIL

ITMEDIAPOS 700

Installation-Options

- Diverse ways for installation



Hyundai ITMC is a registered trademark of ITMediaConsult AG. All other trademarks are the property of their respective manufacturers. We reserve the right to make changes and errors. Please update your existing product information before placing your order. This product information does not constitute a performance guarantee.

Master imaging, setup & customizing, individual lasering with company names and inventory numbering on request, customer-specific hardware adaptation possible for bulk purchases. All systems have the necessary certifications required in the EU.

Specifications may be changed without prior notice. Please update your specification before purchasing the product.



<https://itmediaconsult.de>

ITMediaConsult AG
Gut Retzenhöhe 1
54422 Züsch
Deutschland

Telefon:
06503/98195-0
Email:
vertrieb@itmediaconsult.de

